

Yoshida Tools

Light weight, Powerful and Durable High Blow frequency (90Hz)
 Low Air Consumption Providing high working efficiency


FLUX CHIPPER YFC Series

Direction of Chisel is easily adjusted (YFC-1)

Chisel can be easily exchanged (YFC-2,3)

NEEDLE SCALER YNS-1 Series

Needles can be easily exchanged

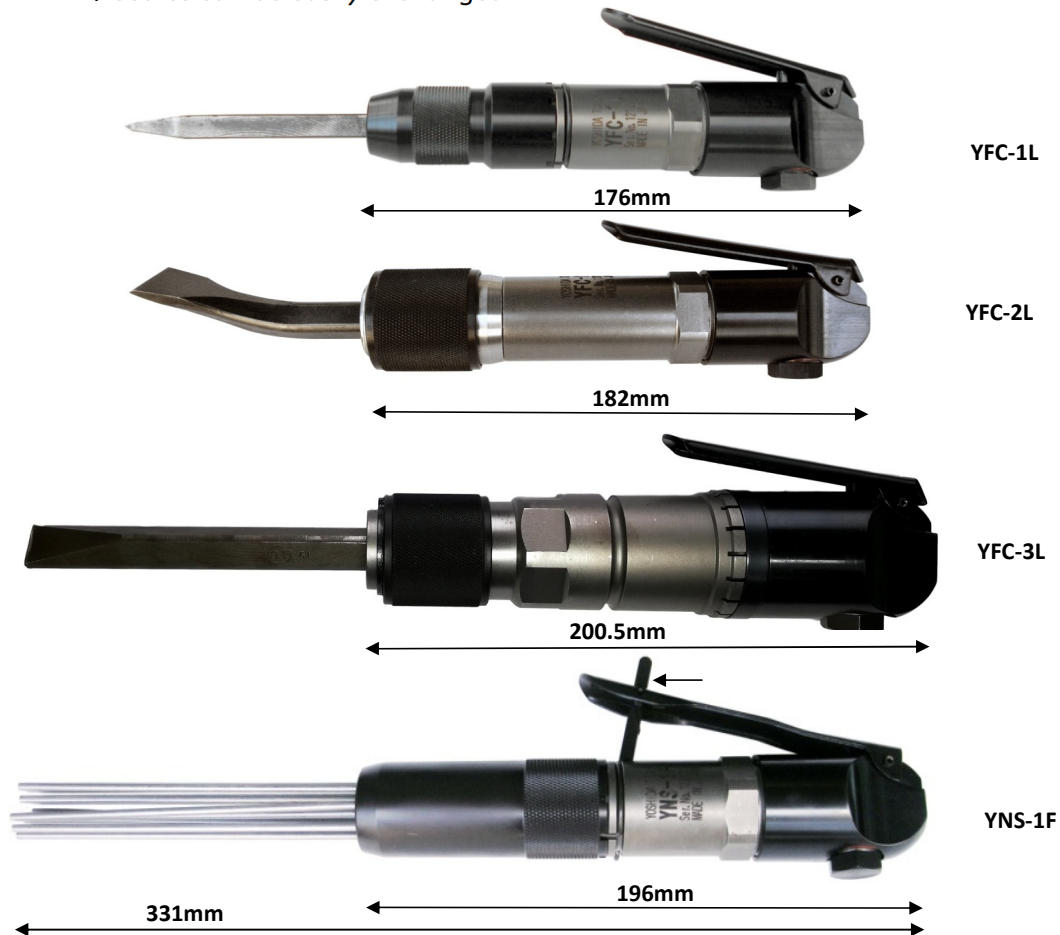

Specification

*Push Lock bar to release the lever

Model	Throttle Type	Blows	Piston Diameter	Stroke	Overall Length	Max Dia	Mass	Max Air Consumption	Air Hose Size	Air Inlet Thread
		Hz	mm	mm	mm	mm				
YFC-1L	Lever	90	20	16	176	36	0.8	0.14	6.3	RC-1/4
YFC-1F	Safety Lever	90	20	16	176	36	0.8	0.14	6.3	RC-1/4
YFC-2L	Lever	90	20	16	182	36	0.99	0.14	6.3	RC-1/4
YFC-2F	Safety Lever	90	20	16	182	36	0.99	0.14	6.3	RC-1/4
YFC-3L	Lever	60	25	20	200.5	44	1.5	0.18	9.5	RC-1/4
YFC-3F	Safety Lever	60	25	20	200.5	44	1.5	0.18	9.5	RC-1/4

Standard Accessory: NL-22PM Coupler Plug

Chisel Shank Size: (YFC-1) ϕ 11x20, (YFC-2,3) ϕ 12x25 Chisels are not included as standard accessory

Model	Throttle Type	Blows	Piston Diameter	Needle	Overall Length	Max Dia	Mass without Needle	Max Air Consumption	Air Hose Size	Air Inlet Thread
		Hz	mm	mm	mm	mm				
YNS-1L	Lever	90	20	3x180-12	196	36	0.97	0.14	6.3	RC-1/4
YNS-1F	Safety Lever	90	20	3x180-12	196	36	0.97	0.14	6.3	RC-1/4

Standard Accessory: NL-22PM Coupler Plug, ND-3180 Needle ϕ 3x180 12

(ND-2180 2mm ϕ 2x180 24 Needle Model is also available)

※Specifications are subjects to change without notice.

YOSHIDA MFG.CO.,LTD.

2021.01

