


# Yoshida Tools

## DIE GRINDERS YG,YGL-23 Series

*Light weight, Powerful and Durable  
Excellent rotation accuracy  
Low noise & Low working oscillation*

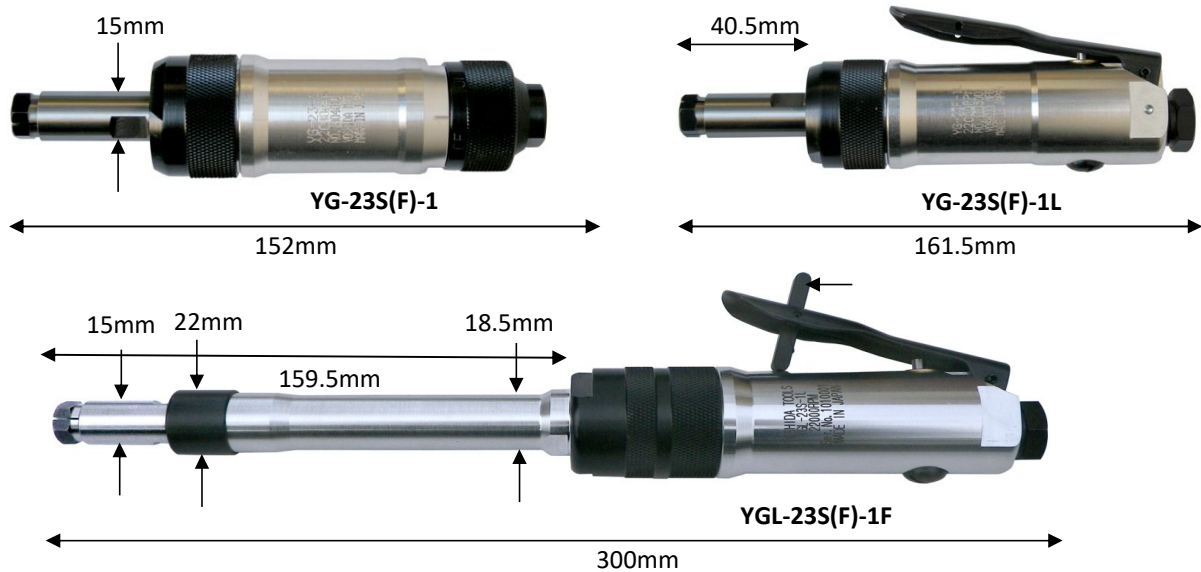

### Specification

\*Push Lock bar to release the lever

Model	Throttle Type	Exhaust Direction	Rotational Frequency	Collet Size	Overall Length	Max Dia	Mass	Max Air Consumption	Air Hose Size	Air Inlet Thread
			min-1	mm	mm	mm	kg	Nm <sup>3</sup> /min	mm	-
YG-23S-1	Roll	Side	22,000	6	152	37	0.46	0.47	9.5	RC1/4
YG-23F-1	Roll	Front	22,000	6	152	37	0.46	0.47	9.5	RC1/4
YG-23S-1S	Safety Roll	Side	22,000	6	157	38	0.47	0.47	9.5	RC1/4
YG-23F-1S	Safety Roll	Front	22,000	6	157	38	0.47	0.47	9.5	RC1/4
YG-23S-1L	Lever	Side	22,000	6	161.5	37	0.48	0.47	9.5	RC1/4
YG-23F-1L	Lever	Front	22,000	6	161.5	37	0.48	0.47	9.5	RC1/4
YG-23S-1F	Safety Lever	Side	22,000	6	161.5	37	0.48	0.47	9.5	RC1/4
YG-23F-1F	Safety Lever	Front	22,000	6	161.5	37	0.48	0.47	9.5	RC1/4
YGL-23S-1	Roll	Side	22,000	6	290.5	37	0.68	0.47	9.5	RC1/4
YGL-23F-1	Roll	Front	22,000	6	290.5	37	0.68	0.47	9.5	RC1/4
YGL-23S-1S	Safety Roll	Side	22,000	6	295.5	38	0.68	0.47	9.5	RC1/4
YGL-23F-1S	Safety Roll	Front	22,000	6	295.5	38	0.68	0.47	9.5	RC1/4
YGL-23S-1L	Lever	Side	22,000	6	300	37	0.71	0.47	9.5	RC1/4
YGL-23F-1L	Lever	Front	22,000	6	300	37	0.71	0.47	9.5	RC1/4
YGL-23S-1F	Safety Lever	Side	22,000	6	300	37	0.71	0.47	9.5	RC1/4
YGL-23F-1F	Safety Lever	Front	22,000	6	300	37	0.71	0.47	9.5	RC1/4

Standard Accessory: NL-22PM Coupler Plug, SPA013 13Hex Wrench(2)

Available Option Collet Size: 3mm or 6.35mm(1/4")

※Specifications are subjects to change without notice.



**YOSHIDA MFG.CO.,LTD.**

2021.01