


Yoshida Tools

HIGH POWER DIE GRINDERS YG,YGL-38 Series

Light weight, Powerful and Durable
Excellent rotation accuracy
Low noise & Low working oscillation

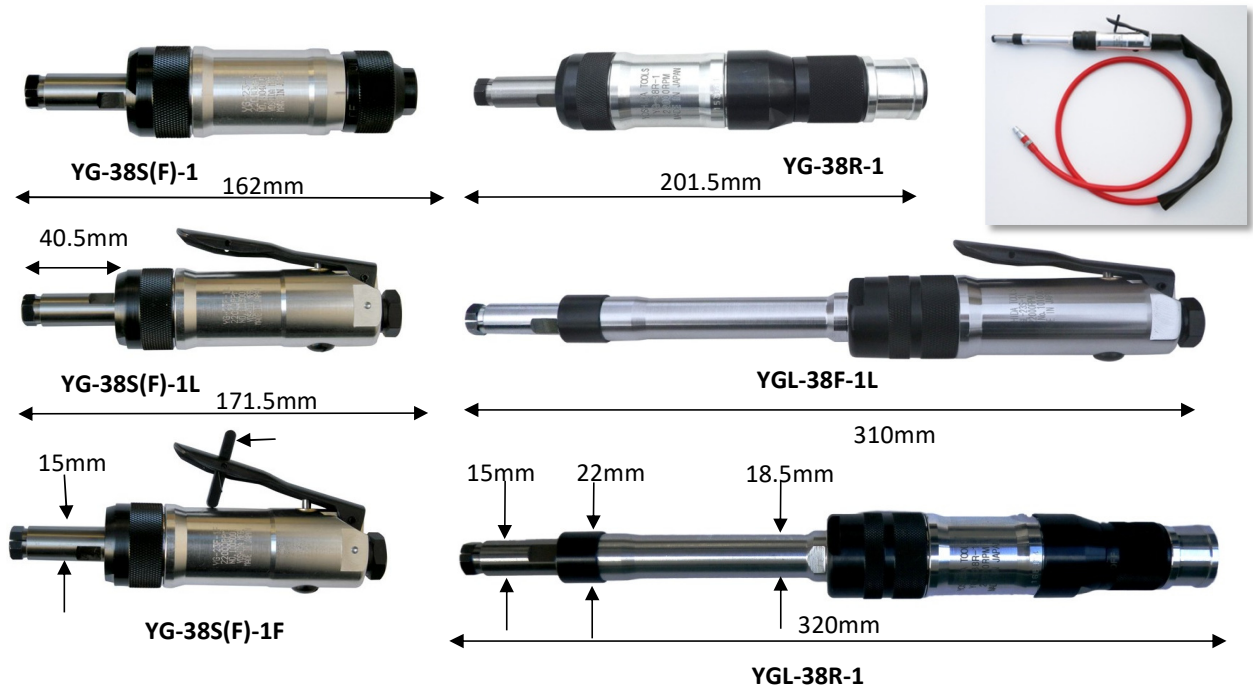

Specification

*Push Lock bar to release the lever

Model	Throttle Type	Exhaust Direction	Rotational Frequency min-1	Collet Size mm	Overall Length mm	Max Dia mm	Mass kg	Max Air Consumption Nm ³ /min	Air Hose Size mm	Air Inlet Thread -
YG-38S-1	Roll	Side	22,000	6	162	37	0.5	0.47	9.5	RC1/4
YG-38F-1	Roll	Front	22,000	6	162	37	0.5	0.47	9.5	RC1/4
YG-38S-1S	Safety Roll	Side	22,000	6	167	38	0.51	0.47	9.5	RC1/4
YG-38F-1S	Safety Roll	Front	22,000	6	167	38	0.51	0.47	9.5	RC1/4
YG-38S-1L	Lever	Side	22,000	6	171.5	37	0.52	0.47	9.5	RC1/4
YG-38F-1L	Lever	Front	22,000	6	171.5	37	0.52	0.47	9.5	RC1/4
YG-38S-1F	Safety Lever	Side	22,000	6	171.5	37	0.52	0.47	9.5	RC1/4
YG-38F-1F	Safety Lever	Front	22,000	6	171.5	37	0.52	0.47	9.5	RC1/4
YG-38R-1	Roll	Rear	22,000	6	201.5	37	0.69	0.47	9.5	RC1/4
YG-38R-1L	Lever	Rear	22,000	6	198.5	37	0.57	0.47	9.5	RC1/4
YG-38R-1F	Safety Lever	Rear	22,000	6	198.5	37	0.57	0.47	9.5	RC1/4
YGL-38S-1	Roll	Side	22,000	6	300.5	37	0.71	0.48	9.5	RC1/4
YGL-38F-1	Roll	Front	22,000	6	300.5	37	0.71	0.48	9.5	RC1/4
YGL-38S-1S	Safety Roll	Side	22,000	6	305.5	37	0.71	0.48	9.5	RC1/4
YGL-38F-1S	Safety Roll	Front	22,000	6	305.5	37	0.71	0.48	9.5	RC1/4
YGL-38S-1L	Lever	Side	22,000	6	310	37	0.74	0.48	9.5	RC1/4
YGL-38F-1L	Lever	Front	22,000	6	310	37	0.74	0.48	9.5	RC1/4
YGL-38S-1F	Safety Lever	Side	22,000	6	310	37	0.74	0.48	9.5	RC1/4
YGL-38F-1F	Safety Lever	Front	22,000	6	310	37	0.74	0.48	9.5	RC1/4
YGL-38R-1	Roll	Rear	22,000	6	320	37	0.79	0.48	9.5	RC1/4
YGL-38R-1L	Lever	Rear	22,000	6	337	37	0.79	0.48	9.5	RC1/4
YGL-38R-1F	Safety Lever	Rear	22,000	6	337	37	0.79	0.48	9.5	RC1/4

Standard Accessory: NL-22PM Coupler Plug, SPA13 13 Hex Wrench(2), FOR YG-38R:IH008 Exhaust Hose 1.5m,EH030 Inlet Hose0.5m

Available Option Collet Size: 3mm or 6.35mm(1/4")

※Specifications are subjects to change without notice.



YOSHIDA MFG.CO.,LTD.

2021.01