


Yoshida Tools

STRAIGHT GRINDERS YG-3H,3HA Series

Light weight, Powerful and Durable

Excellent rotation accuracy

Low noise & Low working oscillation

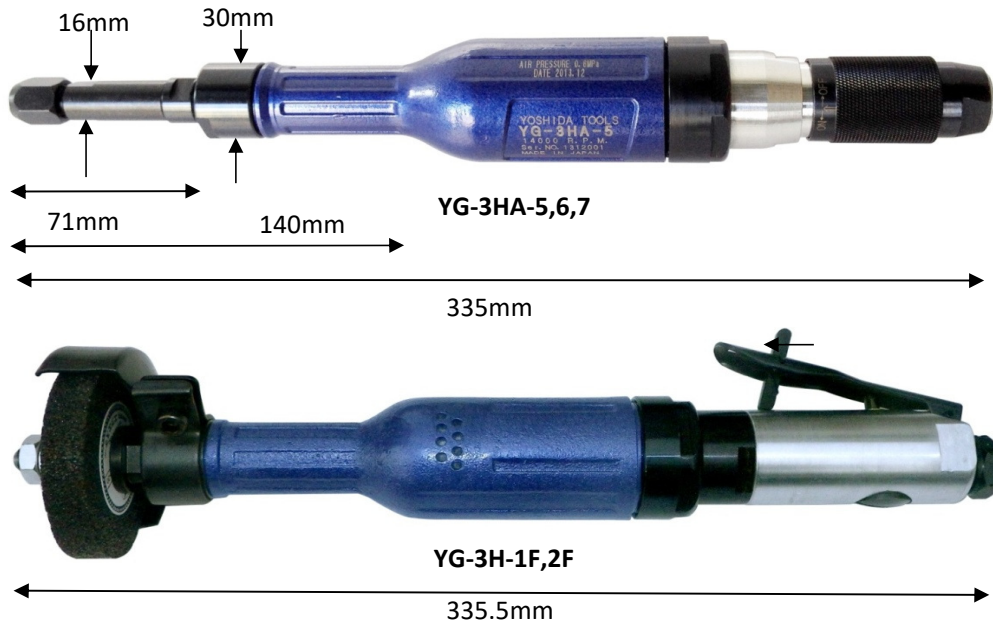

Specification

For Mounted Wheel *Push Lock bar to release the lever

Model	Throttle Type	Exhaust Direction	Rotational Frequency	Collet Size	Overall Length	Wheel Size DxT	Mass	Max Air Consumption	Air Hose Size	Air Inlet Thread
			min-1							
YG-3HA-5	Roll	Side	14,000	6	335	45x13	1.17	0.68	9.5	RC3/8
YG-3HA-5F	Safety Lever	Side	14,000	6	364	45x13	1.29	0.68	9.5	RC3/8
YG-3HA-7	Roll	Side	18,000	6	335	45x13	1.17	0.68	9.5	RC3/8
YG-3HA-7F	Safety Lever	Side	18,000	6	364	45x13	1.29	0.68	9.5	RC3/8

For Wire Brush

Model	Throttle Type	Exhaust Direction	Rotational Frequency	Collet Size	Overall Length	Brush Size DxL	Mass	Max Air Consumption	Air Hose Size	Air Inlet Thread
			min-1							
YG-3HA-6	Roll	Side	12,000	6	335	15x50	1.17	0.65	9.5	RC3/8
YG-3HA-6F	Safety Lever	Side	12,000	6	364	15x50	1.29	0.65	9.5	RC3/8

Standard Accessory: NL-23PM Coupler Plug, SPA14 14Hex Wrenc

Available Option Collet Size: 6.35mm(1/4")

For Grinding Wheel

Model	Throttle Type	Exhaust Direction	Rotational Frequency	Weel Size	Overall Length	Spindle Thread	Mass w/Guard	Max Air Consumption	Air Hose Size	Air Inlet Thread
			min-1							
YG-3H-1	Roll	Side	14,600	65x13x9.53	307	W3/8-16	1.3	0.68	9.5	RC3/8
YG-3H-2	Roll	Side	12,700	75x13x9.53	307	W3/8-16	1.3	0.68	9.5	RC3/8
YG-3H-1F	Safety Lever	Side	14,600	65x13x9.53	335.5	W3/8-16	1.44	0.68	9.5	RC3/8
YG-3H-2F	Safety Lever	Side	12,700	75x13x9.53	335.5	W3/8-16	1.44	0.68	9.5	RC3/8

Standard Accessory: NL-23PM Coupler Plug, SPA021 21Hex Wrench, SPWR005 5Hex Whench

*Specifications are subjects to change without notice.



YOSHIDA MFG.CO.,LTD.

2021.01